



INSTALLATION INSTRUCTIONS

www.vikingbags.com

888-208-1949 | support@vikingbags.com

HARLEY DAVIDSON VIKING SPORT MOTORCYCLE TAIL BAG INSTRUCTION

Instructions

Step 1

Center the Tail bag on the rear end of your motorcycle.



Fig A

Step 2

Four bungee cords are included with the tail bag. With the bag in place, find 2 secure points on either side of the bike and attach the bungee cords to these points. Ensure that the cords are tight and the bag sits securely on the tail of the bike. Note that you may also use the 2 D-rings at the front of the tail bag for mounting. The following image is to be used for reference, your set up may look different depending on the structure of your bike.



Fig B

Combination with our AXE series Saddlebags

Our Tail Bag is well suited to be mounted along with our Axe Series Saddlebags. In addition to giving your bike a coherent look, the tail bag sports 4 straps (2 at front and 2 at back) with male buckles which can be attached to the corresponding female buckles attached to our Saddlebags. See Fig. C for reference.

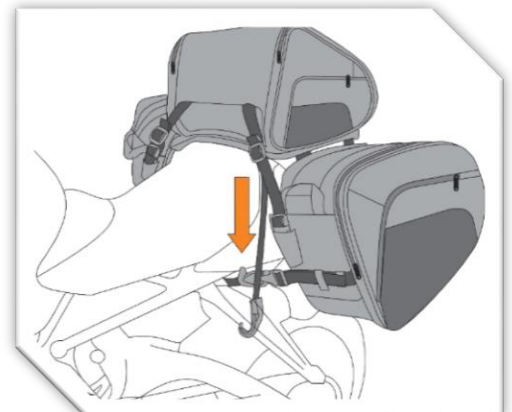


Fig C



INSTALLATION INSTRUCTIONS

www.vikingbags.com

 888-208-1949 |  support@vikingbags.com

Warnings

- ✓ Improper Installation can result in accidents and injury. Always ensure all the straps are tight and the bag is in place.
- ✓ During mounting, no part of the luggage should obstruct any moving part of the motorcycle.
- ✓ Sporadically check the luggage to ensure everything is in place and straps (if any) are tucked away and do not hang in excess
- ✓ It is user's responsibility to install the bags correctly according to the instructions. Viking bags is not responsible for any damage caused due to improper instructions.