



INSTALLATION INSTRUCTIONS

www.vikingbags.com



888-208-1949 |



support@vikingbags.com

INDIAN VIKING PREMIUM LEATHER WRAPPED HARD TRUNK INSTRUCTION

Instructions

Step 1

Place the Viking Hard Trunk on top of the sissy bar. Make sure that the base of the sissy bar is centered with the base of the Trunk.

Step 2

Once in a suitable position, place the provided u-shaped bar under the sissy bar as shown in figure B. Once in place, mark the 2 furthest points in the recess in the bar onto the bottom of the trunk with a sharpie or paint. Ensure that these points lie inside the outline of the sissy bar.

Step 3

With the trunk in the exact same position. Slide the bar to another position (the further the better) and mark the two points similarly for the new position. These 4 points will be used to mount the trunk.

Step 4

Before drilling, ensure that the points marked lie inside the outline of the sissy bar base and there is clearance for bolts to pass through these points once drilled. Now, drill the holes at the marked points.

Step 5

Now place a flat bar inside the bag so the recess in the bar aligns with the 2 drilled points in line. Place 2 washers on top of the bar aligning the hole in each washer with each drilled hole. Once the bar is in place, hold a corresponding u-shaped bar underneath the sissy bar in the same position as the bar placed inside the trunk. Once both bars are in place, pass a bolt through each of the 2 points and use the provided nuts to tighten the bolts.

Step 6

Repeat step 5 for the remaining 2 points.



INSTALLATION INSTRUCTIONS

www.vikingbags.com

☎ 888-208-1949 | ✉ support@vikingbags.com

Step 7

Your trunk is now mounted. Ensure that all bolts are tight and the bag is mounted securely. We recommend that you use blue lock tight to keep bolts from loosening over time.

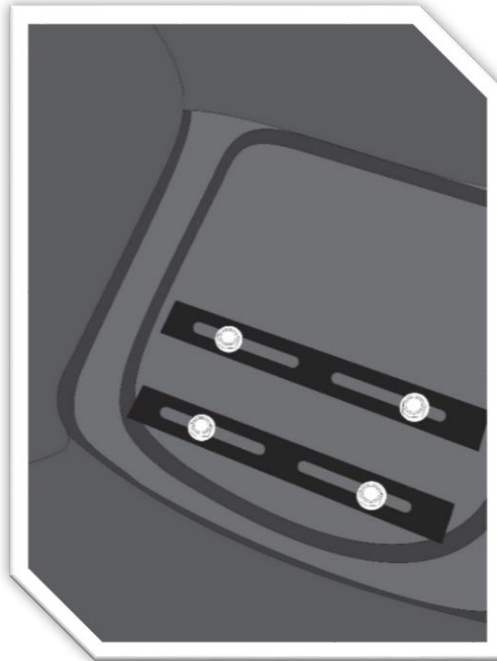


Fig (A)
Inside View

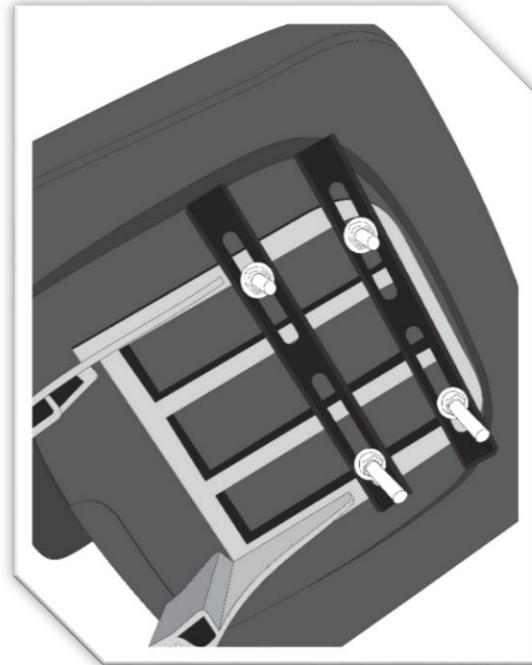


Fig (B)
Bottom View

⚠ Warnings

- ✓ Avoid usage of the any mounting part that is impaired or is not working properly. If you are not sure about the installation process, please seek professional advice.
- ✓ Sporadically check for shifting of the bag and verify that no part of the mounting system is interfering with any part of the motorcycle while riding.
- ✓ This includes the drive train, suspension, brakes or wheels.
- ✓ It is important to note that if you do not mount these saddlebags properly damage may be caused to the saddlebags and/or motorcycle. If bag are securely installed, no part of the mounting system or bags should touch the motorcycle while in operation.
- ✓ Do not attempt to use these saddlebags if the mounting instructions are unclear. It is important that you seek professional assistance from a qualified mechanic or dealer.
- ✓ It is highly dangerous to operate a motorcycle if the saddlebags are not installed correctly. We suggest you find a motorcycle mechanic for further assistance in the event you have doubts about your abilities to install the product securely.
- ✓ Make sure that mounting bolts do not hit the tire inside the fender. In case the bolts are too long, use the provided spacers to adjust for the excessive length.