



INSTALLATION INSTRUCTIONS

www.vikingbags.com

888-208-1949 | support@vikingbags.com

KAWASAKI VIKING MOTORCYCLE SISSYBAR BACKPACK INSTRUCTION

Instruction

Step 1

Make sure that the two long straps (used for wearing the bag on the back) are securely tucked into the pocket on the backpack.

Step 2

Place the bag on the bike such that the wide-strap goes around the backrest as shown in the image. You may place the bag facing forward or backward depending on whether you want to place it on the seat or the luggage rack.

Step 3

Once in place, connect the two short straps on the bottom of the backpack on both sides using easy buckles and pull the straps to tighten them. The two straps must be connected such that they form a loop around the uprights

Step 4

Ensure that the short straps connected through easy buckles are tight and the wide-strap holds the backrest tightly.

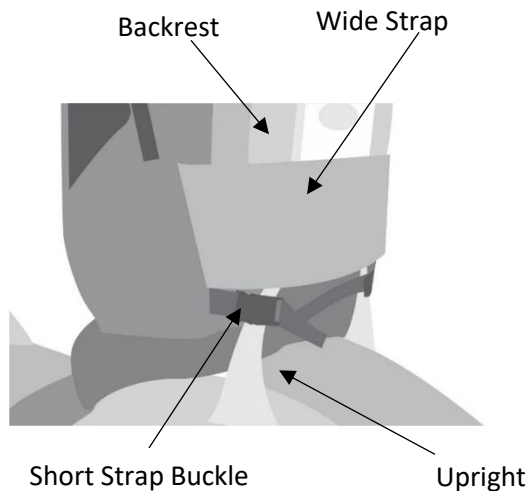


Fig 1 (a) Installed on Passenger Pillion

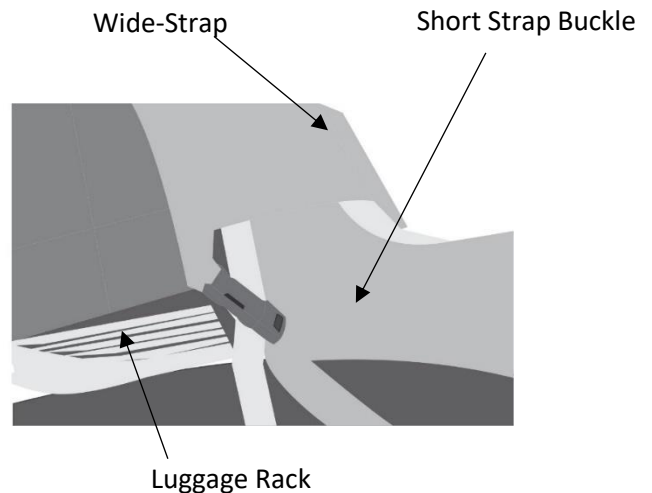


Fig 1 (b) Installed on Luggage Rack

⚠ Warnings

- ✓ When installed on a luggage rack, do not exceed the load limit of the luggage rack.
- ✓ Secure the bag straps to the rack or passenger upright to prevent bag shifting during motorcycle operation.
- ✓ Verify that all straps are secured to prevent strap contact with the rear wheel during motorcycle operation.
- ✓ When installing on passenger pillion, the maximum total weight should not exceed 25 pounds.