



INSTALLATION INSTRUCTIONS

www.vikingbags.com

888-208-1949 | support@vikingbags.com

VIKINGBAGS UNIVERSAL WARRIOR LARGE SLANTED SADDLEBAGS VK-HM INSTRUCTIONS

Parts

VK144-01 Hard Mount Bracket x 2
Socket Head Bolts x 4
Connecting Clamp x 6
Clamp Bolt (with a Nut and a Washer) x 6

Tools

3/8 drive metric socket set
A flat-blade or Philips screw driver
Adjustable wrench
Hammer

Instruction

Step 1

Push the bracket into the clamp slots one by one such that the 3 connecting clamps attach to the three sides of the bracket. Make sure that the flat side of the clamp is at the outer edge of the bracket. You may need to lightly hammer the clamps to push the bracket into the clamp slots.

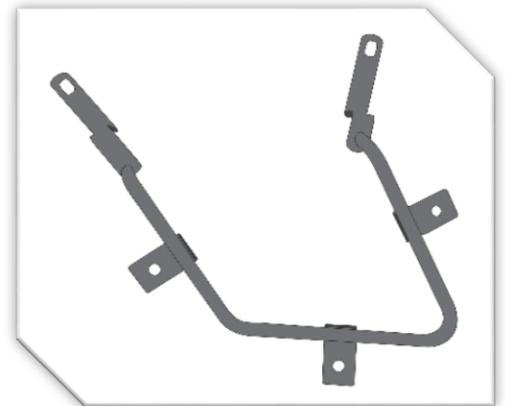


Fig (A)

Step 2

Remove the two fender bolts and align VK144-01 bracket against the holes in the fender. Once aligned, bolt on the brackets using the supplied socket head bolts.

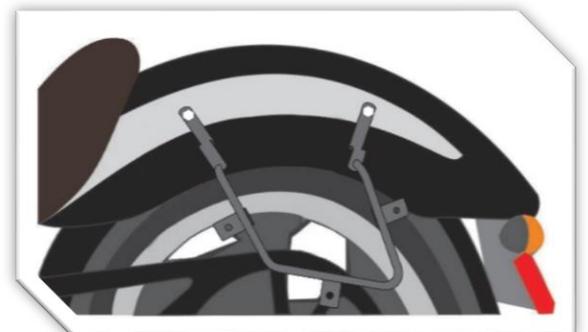


Fig (B)



INSTALLATION INSTRUCTIONS

www.vikingbags.com

☎ 888-208-1949 | ✉ support@vikingbags.com

Step 3

Hold the bag against the bracket to figure out the position where you would like to mount your Saddlebags. Once in position, mark the position of the clamp holes on the back of the bag and drill holes at the marked points.

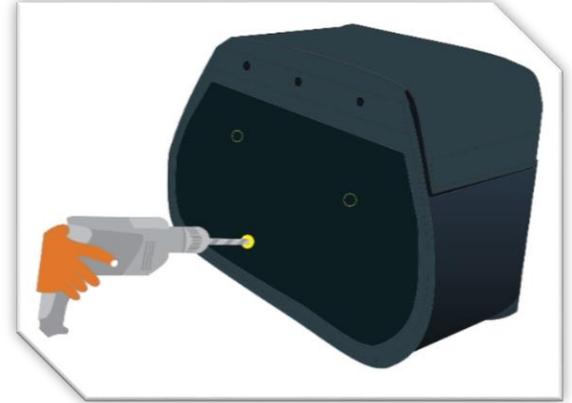


Fig (C)

Step 4

Holding the bag against the bracket with holes aligned, one by one push the clamp bolts from inside the bag through the back of the bag and then through the clamp hole. Tighten the clamp bolts securely using the provided nuts and washers.

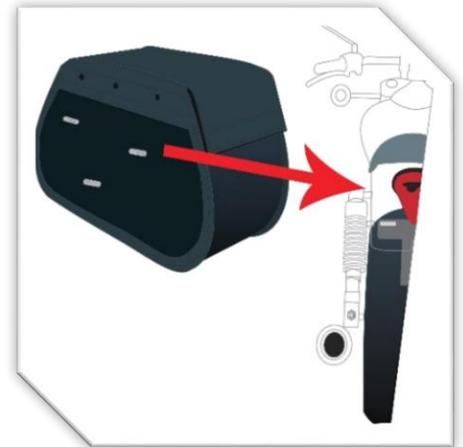


Fig (D)

Step 5

Repeat the process for the other side.

⚠ Warnings

- ✓ Avoid usage of any mounting part that is impaired or is not working properly.
- ✓ If you are not sure about the installation of the saddlebags, do not use them.
- ✓ Sporadically check for shifting of the bag and verify that no part of the mounting system is interfering with any part of the motorcycle while riding. This includes the drive train, suspension, brakes or wheels.
- ✓ It is important to note that if you do not mount these saddlebags properly damage may be caused to the saddlebags and/or motorcycle.
- ✓ If bags are securely installed, no part of the mounting system or bags should touch the motorcycle while in operation.
- ✓ In case you are unsure about your ability to mount the bags securely, please seek assistance from a qualified mechanic.