



Installation Instructions

www.vikingbags.com | 888-208-1949 | support@vikingbags.com

Step 1

Lift the back seat and install the bags on your bike. Your saddlebags must be at least 1 inches clear of any exhaust pipe, while stationary and moving

Step 2

For height adjustment of the bags, separate the two yoke halves and reposition them. Adjust the yoke shorter for higher saddlebags, and vice versa. (See Figure B).

Step 3

When you have the yoke in the correct position, tightly the nylon safety strap using the adjustable D-rings (See Figure C) on the top of the yoke.

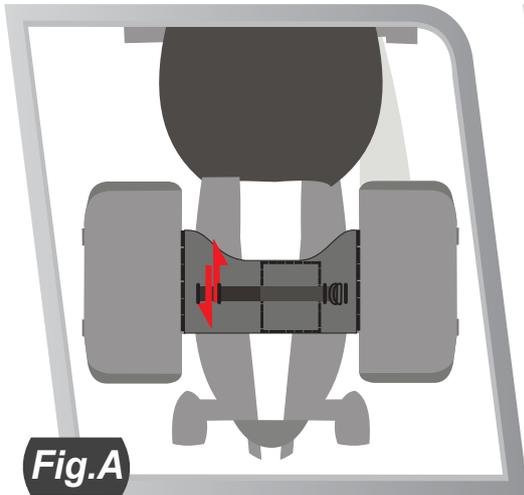


Fig.A

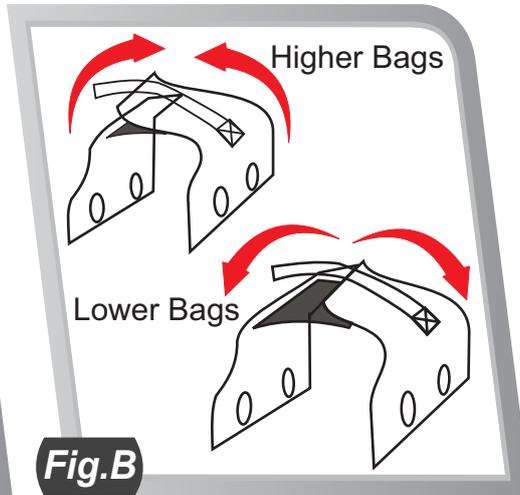


Fig.B

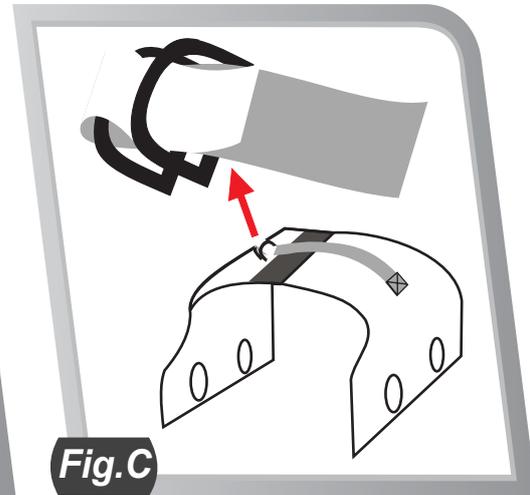


Fig.C

Step 4

Saddlebags are adjustable towards the front/rear of the bike for clearing turn signals and shock absorbers (See Figure D).

Step 5

Use the straps located on the bottom of the each bag (Fig E) to connect the bag to the saddlebag support. Warp them around the support, buckle the ends together, then adjust the length so that straps are tight and they are supporting some of the saddlebags' weight.

Step 6

Now the throw over installation is complete.

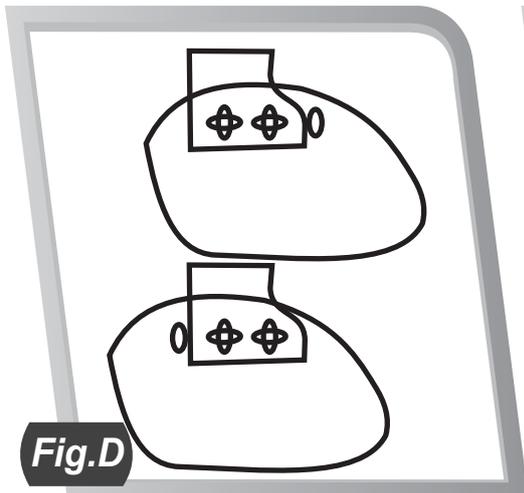


Fig.D

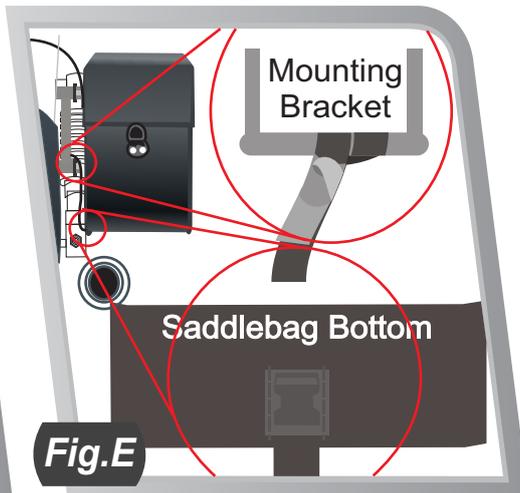


Fig.E

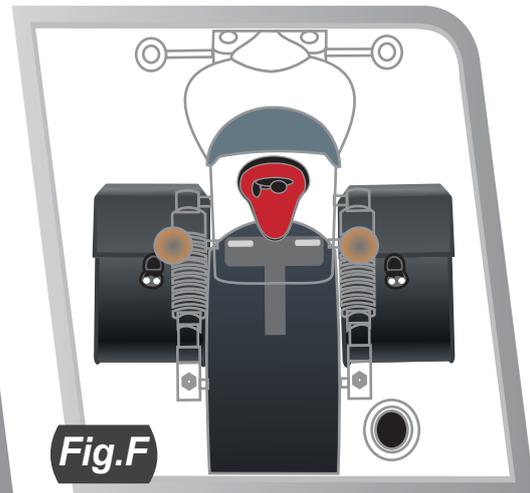


Fig.F




Installation Instructions

www.vikingbags.com | 888-208-1949 | support@vikingbags.com

Step 7

The bag can be easily removed from the bike by turning the quick release knobs 360 degrees. These knobs can be accessed from inside the bags.

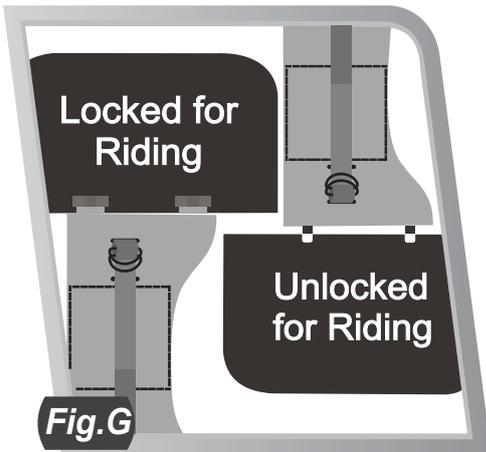

Warnings

Avoid usage of any mounting part that is impaired or is not working properly. If you are not secure about the installation of the saddlebags, do not use them.

It is important to note that if you do not mount these saddlebags properly, damage will be caused to the saddlebags and/or motorcycle. If bags are securely installed, no part of the mounting system or bags should touch the motorcycle while in operation.

Sporadically check for shifting of the bag and verify that no part of the mounting system is interfering with any part of the motorcycle while riding. This includes the drive train, suspension, brakes or wheels.

Do not attempt to use these saddlebags if the mounting instructions are unclear. It is important that you seek professional assistance from a qualified mechanic or dealer.

It is highly dangerous to operate a motorcycle if the saddlebags are not installed correctly. We suggest you find a motorcycle mechanic for further assistance in the event you have doubts about your abilities to install the product securely.

Make sure that mounting bolts do not hit the tire inside the fender. In case the bolts are too long, use the provided spacers to adjust for the excessive length.